


K-L-STECK VERS DER AG OR 1

Male branch tees, angled plug connections, swivel type, parallel male thread with O-ring

HANSA FLEX

Свойства

| | |
|----------------------------|--|
| Рабочее давление | Max. 15 bar, coarse vacuum |
| Область применения | Air, vacuum |
| рекомендуемые шланги | PU or PA (nylon) |
| Рабочие среды | Compressed air and all gases or liquids that are compatible with the materials |
| Область температур | -20 °C to +80 °C |
| Уплотнительная поверхность | Parallel version: O-ring in housing |
| Материал | Plastic, Nickel plated brass |
| Прижимное кольцо | Plastic |

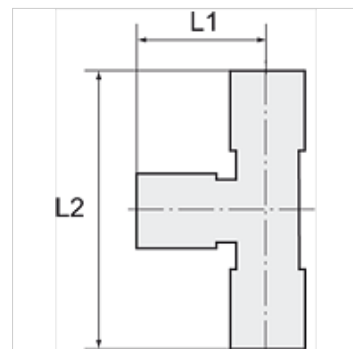

Указание

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Изделие

| Наименование | Резьба | для наружного Ø шланга | L1 (mm) | L2 (mm) | SW |
|----------------|--------|------------------------|------------|------------|-------|
| K- 07 40 02 18 | M 5 | 4 mm | 18,0 | 37,2 | 8 mm |
| K- 07 40 02 19 | M 5 | 6 mm | 20,1 | 40,2 | 8 mm |
| K- 07 40 02 32 | G 1/8 | 4 mm | 18,0 | 35,1 | 14 mm |
| K- 07 40 02 33 | G 1/8 | 6 mm | 20,1 | 38,1 | 14 mm |
| K- 07 40 02 34 | G 1/8 | 8 mm | 22,7 | 45,2 | 14 mm |
| K- 07 40 02 30 | G 1/8 | 10 mm | 26,9 | 51,3 | 17 mm |
| K- 07 40 02 31 | G 1/8 | 12 mm | 29,3 | 54,9 | 17 mm |
| K- 07 40 02 27 | G 1/4 | 4 mm | 18,0 | 35,1 | 17 mm |
| K- 07 40 02 28 | G 1/4 | 6 mm | 20,1 | 38,1 | 17 mm |
| K- 07 40 02 29 | G 1/4 | 8 mm | 22,7 | 41,2 | 17 mm |
| K- 07 40 02 25 | G 1/4 | 10 mm | 26,9 | 52,3 | 17 mm |
| K- 07 40 02 26 | G 1/4 | 12 mm | 29,3 | 55,9 | 17 mm |
| K- 07 40 02 38 | G 3/8 | 6 mm | 20,1 | 39,2 | 20 mm |
| K- 07 40 02 39 | G 3/8 | 8 mm | 22,7 | 42,3 | 20 mm |
| K- 07 40 02 35 | G 3/8 | 10 mm | 26,9 | 49,3 | 20 mm |
| K- 07 40 02 36 | G 3/8 | 12 mm | 29,3 | 52,9 | 20 mm |
| K- 07 40 02 37 | G 3/8 | 16 mm | 34,5 | 66,2 | 20 mm |
| K- 07 40 02 23 | G 1/2 | 6 mm | 20,1 | 43,6 | 24 mm |
| K- 07 40 02 24 | G 1/2 | 8 mm | 22,7 | 44,7 | 24 mm |
| K- 07 40 02 20 | G 1/2 | 10 mm | 26,9 | 51,2 | 24 mm |
| K- 07 40 02 21 | G 1/2 | 12 mm | 29,3 | 54,8 | 24 mm |
| K- 07 40 02 22 | G 1/2 | 16 mm | 34,5 | 62,9 | 24 mm |