


K-X-STECKVERBINDUNG

X-unions

HANSA FLEX

Свойства

| | |
|----------------------|--|
| Рабочее давление | Max. 15 bar, coarse vacuum |
| Область применения | Air, vacuum |
| рекомендуемые шланги | PU or PA (nylon) |
| Рабочие среды | Compressed air and all gases or liquids that are compatible with the materials |
| Область температур | -20 °C to +80 °C |
| Материал | Plastic, Nickel plated brass |
| Прижимное кольцо | Plastic |

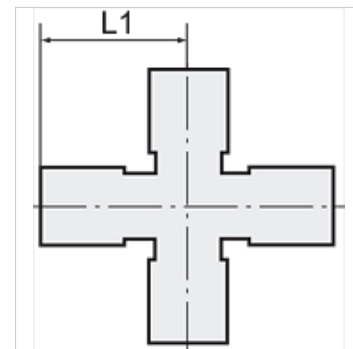

Указание

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Изделие

| Наименование | для наружного Ø шланга | L1 (mm) |
|----------------|------------------------|------------|
| K- 07 40 03 70 | 4 mm | 17,5 |
| K- 07 40 03 71 | 6 mm | 19,0 |
| K- 07 40 03 72 | 8 mm | 22,8 |
| K- 07 40 03 73 | 10 mm | 27,9 |
| K- 07 40 03 74 | 12 mm | 29,3 |