



K-ABSPV STECK GEW SCH OR

Shut-off valves, male thread, plug connection, flow direction to tube, parallel thread with O-ring

HANSA FLEX

Свойства

| | |
|----------------------------|--|
| Рабочее давление | Max. 15 bar, coarse vacuum |
| Область применения | Air, vacuum |
| рекомендуемые шланги | PU or PA (nylon) |
| Рабочие среды | Compressed air and all gases or liquids that are compatible with the materials |
| Область температур | -20 °C to +80 °C |
| Уплотнительная поверхность | Parallel version: O-ring in housing, Conical version: thread coating |
| Материал | Plastic, Nickel plated brass |
| Прижимное кольцо | Plastic |

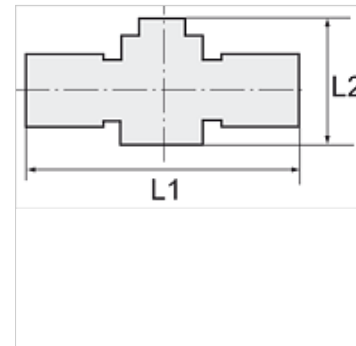

Указание

Прочие данные только по запросу.

Описание

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Изделие

| Наименование | Резьба | для наружного Ø шланга | L1 (mm) | L2 (mm) | SW |
|----------------|--------|------------------------|---------|---------|-------|
| K- 07 40 08 01 | G 1/8 | 6 mm | 58,0 | 42,6 | 14 mm |
| K- 07 40 08 02 | G 1/8 | 8 mm | 58,4 | 42,6 | 14 mm |
| K- 07 40 07 99 | G 1/4 | 6 mm | 59,8 | 42,6 | 12 mm |
| K- 07 40 08 00 | G 1/4 | 8 mm | 59,9 | 42,6 | 17 mm |
| K- 07 40 07 97 | G 1/4 | 10 mm | 70,9 | 47,0 | 17 mm |
| K- 07 40 07 98 | G 1/4 | 12 mm | 70,9 | 47,0 | 21 mm |
| K- 07 40 08 05 | G 3/8 | 8 mm | 61,4 | 42,6 | 17 mm |
| K- 07 40 08 03 | G 3/8 | 10 mm | 72,4 | 47,0 | 20 mm |
| K- 07 40 08 04 | G 3/8 | 12 mm | 71,9 | 47,0 | 21 mm |
| K- 07 40 07 95 | G 1/2 | 10 mm | 75,9 | 47,0 | 24 mm |
| K- 07 40 07 96 | G 1/2 | 12 mm | 75,4 | 47,0 | 24 mm |