


K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

HANSA FLEX

Свойства

Входное давление	Max. 16 bar
Выходное давление	corresponds to the set pressure of the pilot pressure regulator
Температура среды	max. 60 °C
Температура окружающей среды	Max. 60 °C
Набивочный материал	Нитрильный каучук
Корпус	Die-cast zinc, Aluminium for G 1 variant
Измерение расхода воздуха	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar
Подключение управляющего воздуха	G 1/8

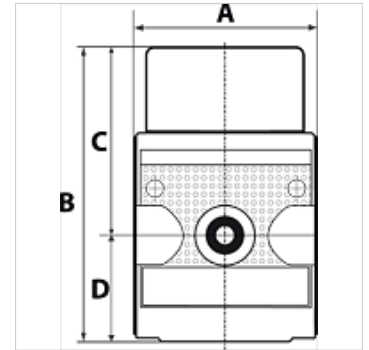

Указание

Прочие данные только по запросу.

Описание

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Изделие

Наименование	Резьба	Расход (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 19 56	G 1/4	1800	48,0	75,0 mm	48,0	27,0
K- 07 25 19 57	G 1/2	4800	69,0	94,0 mm	59,0	35,0
K- 07 25 19 58	G 1	12500	100,0	112,0 mm	60,0	52,0

Запасные части

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-VERSCHLEI-SATZ MULTIFIX	Set of wearing parts »multifix«