


Vlastnosti

| | |
|-------------------|-----------------------------|
| Prípojka 1 | Prípojka k spájkovaniu |
| Prípojka 2 | Vonkajší závit BSP, valcový |
| Tvar tesnenia 2 | Vnútorný kužeľ 60° |
| Konštrukcia | Hrdlo k spájkovaniu |
| Vyhotovenie | priame |
| Materiál | Oceľ |
| Povrchová ochrana | olejom |

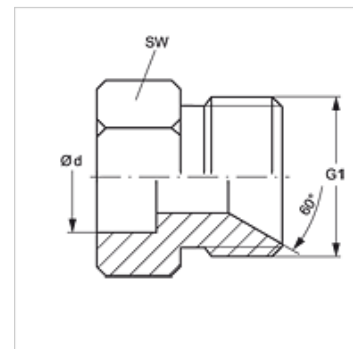

Výrobok

| Označenie | Ø d (mm) | G1 | L1 (mm) | SW (mm) |
|---------------|----------|------------|---------|---------|
| LOET 04 HB 08 | 8 | G 1/4" -19 | 21,0 | 19 |
| LOET 04 HB 12 | 12 | G 1/4" -19 | 21,0 | 19 |
| LOET 06 HB 14 | 14 | G 3/8" -19 | 27,0 | 24 |
| LOET 06 HB 16 | 16 | G 3/8" -19 | 27,0 | 24 |
| LOET 08 HB 14 | 14 | G 1/2" -14 | 29,5 | 29 |
| LOET 08 HB 16 | 16 | G 1/2" -14 | 29,5 | 24 |
| LOET 08 HB 18 | 18 | G 1/2" -14 | 29,5 | 29 |
| LOET 08 HB 20 | 20 | G 1/2" -14 | 32,5 | 29 |
| LOET 12 HB 20 | 20 | G 3/4" -14 | 37,5 | 35 |
| LOET 12 HB 25 | 25 | G 3/4" -14 | 37,5 | 35 |
| LOET 16 HB 25 | 25 | G 1" -11 | 41,0 | 43 |
| LOET 16 HB 30 | 30 | G 1" -11 | 41,0 | 43 |

Ø d = Vonkajší priemer rúrky