



# RBS M

Poistka proti prasknutiu rúrky M

**HANSA FLEX**

## Vlastnosti

|                  |              |
|------------------|--------------|
| Materiál         | Oceľ         |
| Prevádzkový tlak | max. 400 bar |

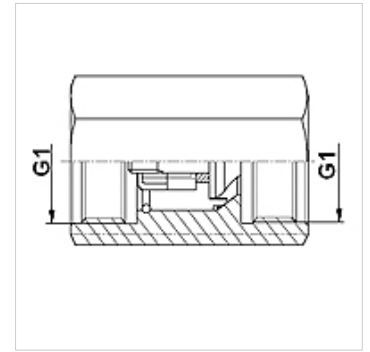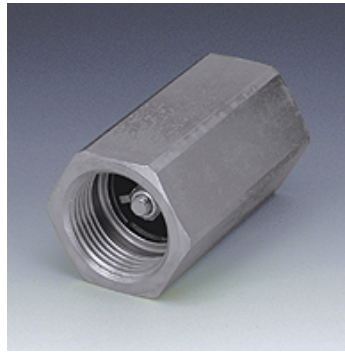

## Výrobok

| Označenie       | Prevádzkový tlak (bar) | G1         | Uzatváracie množstvo (L/min) | Hmotnosť (kg) |
|-----------------|------------------------|------------|------------------------------|---------------|
| RBS 06-20 M 16  | 400,0                  | M 16 x 1,5 | 20                           | 0,30          |
| RBS 06-40 M 16  | 400,0                  | M 16 x 1,5 | 40                           | 0,30          |
| RBS 10-63 M 22  | 315,0                  | M 22 x 1,5 | 63                           | 0,30          |
| RBS 10-90 M 22  | 315,0                  | M 22 x 1,5 | 90                           | 0,35          |
| RBS 16-200 M 30 | 315,0                  | M 30 x 1,5 | 200                          | 0,35          |