



PHY 100

Objímka k nalisovaniu, NY 100

HANSA FLEX

Vlastnosti

| | |
|-------------------|-----------------------|
| Druh uchytienia | Objímka bez strhnutia |
| Materiál | Oceľ |
| Povrchová ochrana | galvanický povlak |

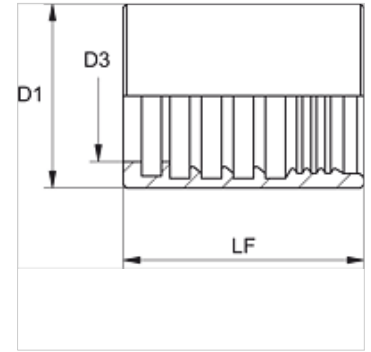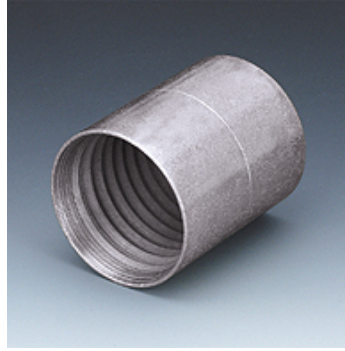

Výrobok

| Označenie | DN* | Rozmer | Clo | D1 (mm) | D3 (mm) | LF (mm) |
|-----------|-----|--------|-------|------------|------------|------------|
| PHY 104 | 5 | 3 | 3/16" | 16,0 | 9,5 | 28,0 |
| PHY 106 | 6 | 4 | 1/4" | 19,0 | 11,6 | 29,5 |
| PHY 108 | 8 | 5 | 5/16" | 22,0 | 12,7 | 29,5 |
| PHY 110 | 10 | 6 | 3/8" | 23,0 | 14,3 | 32,8 |
| PHY 113 | 12 | 8 | 1/2" | 26,0 | 18,6 | 34,0 |
| PHY 116 | 16 | 10 | 5/8" | 30,0 | 22,0 | 36,5 |
| PHY 120 | 19 | 12 | 3/4" | 33,0 | 25,7 | 41,0 |
| PHY 125 | 25 | 16 | 1" | 40,0 | 31,8 | 41,0 |

DN = menovitý priemer, menovitá šírka