

# SF O-RING V

Krúžok O, 90SH FKM (FPM)


## Vlastnosti

Konštrukcia pravouhlý tvar

Teplota min. -15 °C

Teplota max. 200 °C

Materiál FKM SH 90 (Viton)

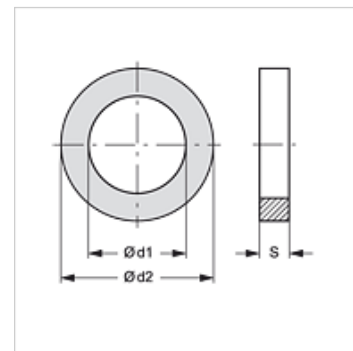

## Výrobok

| Označenie     | DN* | Rozmer | Clo    | Ø d1<br>(mm) | Ø d2<br>(mm) | S<br>(mm) |
|---------------|-----|--------|--------|--------------|--------------|-----------|
| SF ORING 13 V | 12  | 8      | 1/2"   | 18,66        | 25,72        | 3,53      |
| SF ORING 20 V | 19  | 12     | 3/4"   | 24,99        | 32,05        | 3,53      |
| SF ORING 25 V | 25  | 16     | 1"     | 32,92        | 39,98        | 3,53      |
| SF ORING 32 V | 31  | 20     | 1.1/4" | 37,70        | 44,76        | 3,53      |
| SF ORING 40 V | 38  | 24     | 1.1/2" | 47,22        | 54,28        | 3,53      |
| SF ORING 50 V | 51  | 32     | 2"     | 56,74        | 63,80        | 3,53      |
| SF ORING 60 V | 60  | 40     | 2.1/2" | 69,45        | 76,51        | 3,53      |
| SF ORING 75 V | 76  | 48     | 3"     | 85,32        | 92,38        | 3,53      |

## Varianty produktu

SF O-RING PU