

2 OK

Svorka s 2 okami


HANSA FLEX

Vlastnosti

Oblasť použitia Upevňovanie hadíc v nízkotlakovej oblasti

Materiál Oceľ

Povrchová ochrana galvanický povlak

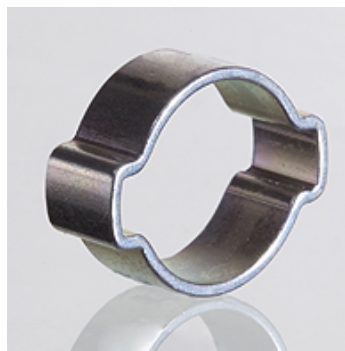

Výrobok

| Označenie | Rozsah upínania (mm) | Šírka pásu (mm) |
|------------|----------------------|-----------------|
| 2 OK 5-7 | 5 - 7 | 6,0 |
| 2 OK 7-9 | 7 - 9 | 6,0 |
| 2 OK 9-11 | 9 - 11 | 6,5 |
| 2 OK 11-13 | 11 - 13 | 6,5 |
| 2 OK 13-15 | 13 - 15 | 7,0 |
| 2 OK 14-17 | 14 - 17 | 7,0 |
| 2 OK 15-18 | 15 - 18 | 7,5 |
| 2 OK 17-20 | 17 - 20 | 7,5 |
| 2 OK 18-21 | 18 - 21 | 8,0 |
| 2 OK 20-23 | 20 - 23 | 8,0 |
| 2 OK 22-25 | 22 - 25 | 8,5 |
| 2 OK 23-27 | 23 - 27 | 8,5 |
| 2 OK 25-28 | 25 - 28 | 9,0 |
| 2 OK 28-31 | 28 - 31 | 9,0 |
| 2 OK 31-34 | 31 - 34 | 9,5 |
| 2 OK 34-37 | 34 - 37 | 9,5 |
| 2 OK 37-40 | 37 - 40 | 10,0 |
| 2 OK 40-43 | 40 - 43 | 10,0 |
| 2 OK 43-46 | 43 - 46 | 10,0 |

Varianty produktu

2 OK VC Svorka s 2 okami, chrómovo lesklo pozinkované

2 OK VA Svorka s 2 okami, Ušľachtilá oceľ