

# 2 OK

Svorka s 2 okami


**HANSA FLEX**

## Vlastnosti

**Oblasť použitia** Upevňovanie hadíc v nízkotlakovej oblasti

**Materiál** Oceľ

**Povrchová ochrana** galvanický povlak

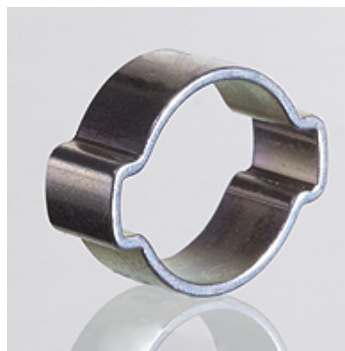

## Výrobok

| Označenie  | Rozsah upínania (mm) | Šírka pásu (mm) |
|------------|----------------------|-----------------|
| 2 OK 5-7   | 5 - 7                | 6,0             |
| 2 OK 7-9   | 7 - 9                | 6,0             |
| 2 OK 9-11  | 9 - 11               | 6,5             |
| 2 OK 11-13 | 11 - 13              | 6,5             |
| 2 OK 13-15 | 13 - 15              | 7,0             |
| 2 OK 14-17 | 14 - 17              | 7,0             |
| 2 OK 15-18 | 15 - 18              | 7,5             |
| 2 OK 17-20 | 17 - 20              | 7,5             |
| 2 OK 18-21 | 18 - 21              | 8,0             |
| 2 OK 20-23 | 20 - 23              | 8,0             |
| 2 OK 22-25 | 22 - 25              | 8,5             |
| 2 OK 23-27 | 23 - 27              | 8,5             |
| 2 OK 25-28 | 25 - 28              | 9,0             |
| 2 OK 28-31 | 28 - 31              | 9,0             |
| 2 OK 31-34 | 31 - 34              | 9,5             |
| 2 OK 34-37 | 34 - 37              | 9,5             |
| 2 OK 37-40 | 37 - 40              | 10,0            |
| 2 OK 40-43 | 40 - 43              | 10,0            |
| 2 OK 43-46 | 43 - 46              | 10,0            |

## Varianty produktu

**2 OK VC** Svorka s 2 okami, chrómovo lesklo pozinkované

**2 OK VA** Svorka s 2 okami, Ušľachtilá oceľ