

KLEMMSCHEL

Clamp, Aluminium

HANSA FLEX

Vlastnosti


Použitie Clamping components for small flange connections

Vyhotovenie Clamp aluminum

Norma DIN 28403
ISO 2861

Materiál Hliník

Rozsah teplôt Hliník od -156 °C do 150 °C

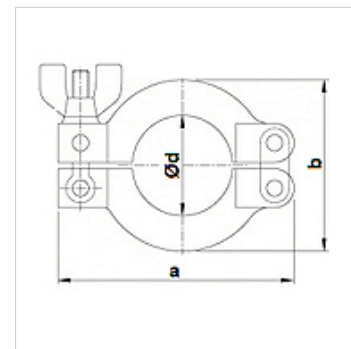

Poznámka

Rozsah tlaku od 10–7 mbar do 2,5 bar

Pokyny pre objednanie

Iné vyhotovenia na vyžiadanie

Výrobok

| Označenie | Šírka (mm) | a (mm) | b (mm) | $\varnothing d$ (mm) |
|-------------------|---------------|-----------|-----------|-------------------------|
| KLEMMSCHEL 010/16 | 17,0 | 63,0 | 45,0 | 22,0 |
| KLEMMSCHEL 020/25 | 17,0 | 73,0 | 52,0 | 32,0 |
| KLEMMSCHEL 032/40 | 17,0 | 93,0 | 70,0 | 47,0 |
| KLEMMSCHEL 050 | 22,0 | 114,0 | 95,0 | 62,0 |