



# HK GEH 20 GGG

Plášť ventilu pre ventil na zaskrutkovanie SAE 2-cestný GGG40

**HANSA FLEX**

## Vlastnosti

Materiál	GGG 40
Prevádzkový tlak	max. 350 bar
Povrchová ochrana	pozinkované

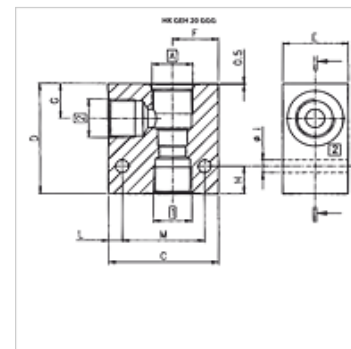

## Výrobok

Označenie	Otvor ventilu	A:	Prípojka 1,3 C	D:	E	F	G	V	I	D	M	Hmotnosť	
				(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	
HK GEH 38 C0820 GGG	C0820	UNF 3/4"	G 3/8"	50	50	29	20	13,5	12	6	9,0	35	0,4
HK GEH 38 C1020 GGG	C1020	UNF 7/8"	G 3/8"	60	60	40	24	19,0	15	7	7,5	45	0,8
HK GEH 34 C1020 GGG	C1020	UNF 7/8"	G 3/4"	60	60	44	24	21,5	15	7	7,5	45	1,7
HK GEH 12 C1220 GGG	C1220	UNF 1,1/16"	G 1/2"	80	80	50	34	26,0	18	9	10,0	60	0,9
HK GEH 34 C1220 GGG	C1220	UNF 1,1/16"	G 3/4"	80	80	50	34	26,0	18	9	10,0	60	1,7

## tvorí príslušenstvo pre nasledujúce produkty

HK EMDV	2/2-cestný magnetický sedlový ventil EMDV
HK RVPS	Ventil obmedzovača tlaku RVPS
HK PCFC	2-cestný regulačný prúdový ventil PCFC