

HK AX RU


Prípojka oleja axiálna kruhová

HANSA FLEX

Vlastnosti

Materiál Oceľ S355J0 (Fe510C)

Použitie axiálna prípojka oleja pre hydraulický valec

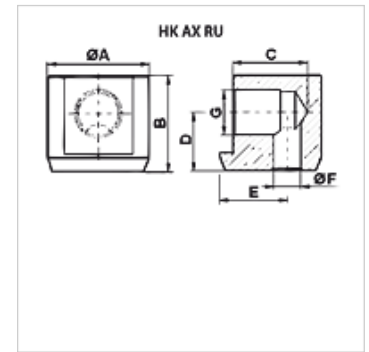

Výrobok

| Označenie | Ø A (mm) | B (mm) | C (mm) | D: (mm) | E (mm) | G | Ø F (mm) | Hmotnosť (kg) |
|--------------|-------------|-----------|-----------|------------|-----------|--------|-------------|------------------|
| HK 014 AX RU | 30 | 28 | 22 | 17 | 20,0 | G 1/4" | 8 | 0,12 |
| HK 038 AX RU | 35 | 34 | 24 | 22 | 22,5 | G 3/8" | 8 | 0,20 |
| HK 012 AX RU | 45 | 47 | 30 | 31 | 27,5 | G 1/2" | 12 | 0,45 |
| HK 034 AX RU | 50 | 52 | 34 | 32 | 30,0 | G 3/4" | 14 | 0,58 |
| HK 100 AX RU | 60 | 62 | 42 | 39 | 35,0 | G 1" | 16 | 1,02 |