

# TUE FF PN16

PEVNÁ príruha, s ozubeným hrdlom, PN10/16, oceľ VZ

**HANSA FLEX**

## Vlastnosti


**Prípojka 1** Pevná príruha  
v úrovni tlaku PN16

**Vyhotovenie** priame

**Tvar tesnenia 1** s plochým tesnením

**Oblasť použitia** Priemysel

**Norma** DIN EN 1092-1

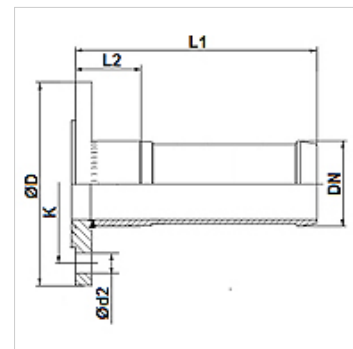

## Výrobok

Označenie	DN*	Rozmer	Clo	Ø D (mm)	K (mm)	Ø d2 (mm)	N (mm)
TUE 20 FF PN16	20	12	3/4"	105,0	75	14	4
TUE 25 FF PN16	25	16	1"	115,0	85	14	4
TUE 32 FF PN16	32	20	1.1/4"	140,0	100	18	4
TUE 38 FF PN16	40	24	1.1/2"	150,0	110	18	4
TUE 50 FF PN16	50	32	2"	165,0	125	18	4
TUE 63 FF PN16	63	40	2.1/2"	185,0	145	18	4
TUE 75 FF PN16	75	50	3"	200,0	160	18	8
TUE 102 FF PN16	100	64	4"	220,0	180	18	8

N = počet otvorov

## Príslušenstvo

**KS AL** Upínacia miska, hliník

**KS FIX AL** Upínacia miska pre kolíkovanie, hliník

## Prídavné elementy

**FD C4400** Ploché tesnenie