


K-DICHTRINGE PTFE

Sealing rings, PTFE (PTFE), max. temperature 260 °C

HANSA FLEX

Vlastnosti

| | |
|----------|--------------|
| Teplota | Max. +260 °C |
| Materiál | PTFE |

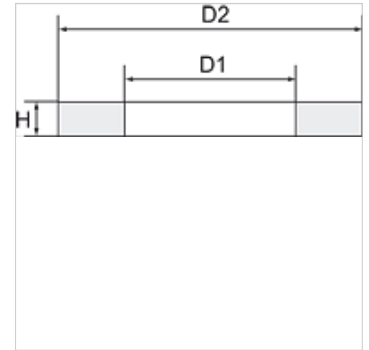

Poznámka

Ďalšie údaje na vyžiadanie.

Pokyny pre objednanie

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Výrobok

| Označenie | pre závit | D1 (mm) | D2 (mm) | V (mm) |
|----------------|-----------|------------|------------|-----------|
| K- 07 10 03 16 | M 5 | 5,1 | 8,0 | 1,0 |
| K- 07 10 03 20 | G 1/2 | 21,0 | 28,0 | 1,5 |
| K- 07 10 03 18 | G 1/4 | 13,2 | 18,0 | 1,5 |
| K- 07 10 03 19 | G 3/8 | 16,8 | 22,0 | 1,5 |
| K- 07 10 03 22 | G 1 | 33,3 | 38,9 | 2,0 |
| K- 07 10 03 21 | G 3/4 | 26,5 | 33,0 | 2,0 |
| K- 07 10 03 17 | G 1/8 | 10,0 | 13,0 | 1,5 |