
K-SPIR SCHL KUPPL SET

Spiral hose and coupling kits

Vlastnosti

Prevádzkový tlak	max. 10 bar (to the temperature +20 °C); max. 7 bar (at temperature +40 °C); max. 5 bar (at temperature +60 °C)
Spojka	High quality hand quick release coupling of steel for high flow rates For demanding applications with high mechanical wear
špirálová hadica	Polyurethane

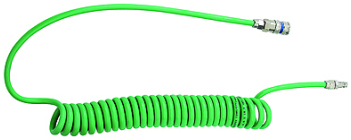

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

Výrobok

Označenie	Rozmer hadice	Ø špirály (mm)	Pracovná dĺžka (m)
K- 07 10 07 56	10 mm x 6,5 mm	52	4,0
K- 07 10 07 57	10 mm x 6,5 mm	52	6,0
K- 07 10 07 58	12 mm x 8 mm	65	8,0

Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.