

K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

Vlastnosti

Vlastnosti	Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Various power ratings for optimised air consumption
Použitie	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. \nConstruction of ejector blocks for centralised or decentralised individual control of suction pads.
Systém trysiek	Brass
Prípojka	Push-in coupling
Tlmič hluku	Plastic
Základné teleso	Impact-resistant plastic

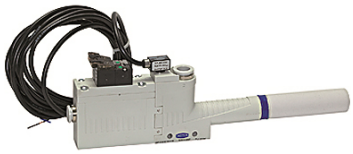

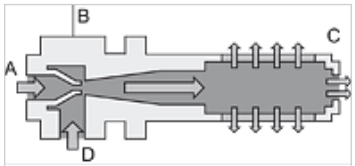

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Výrobok

Označenie	Veľkosť trysky	Sací ventil pokojová poloha	Prípoj stlačeného vzduchu	Pripojenie vákua	Rozmer
K- 07 45 01 20	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 22	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 24	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 26	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

Príslušenstvo

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit

Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.