
# K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

## Vlastnosti

| | |
|---|---|
| **Vlastnosti** | Vacuum generator with high maximum vacuum level (85% vacuum)<br>No moving parts, which means no wear and no maintenance<br>ultra small footprint, suitable for confined spaces<br>minimal air consumption<br>\nlow noise |
| **Použitie** | by screwing / plugging into the distribution beam direct attachment to the suction pad<br>for handling various workpieces |
| **Kryt** | Aluminium eloxed (type VR) |
| **Systém trysiek** | Brass (type VR) |
| **Prípojka** | Násuvná prípojka |

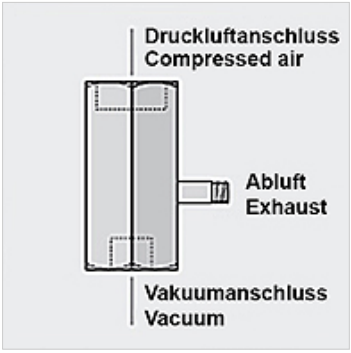


## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

## Výrobok

| Označenie | Veľkosť trysky | Prípojka odpadového vzduchu | Prípoj stlačeného vzduchu | Pripojenie vákua | Stupeň vákuovania | Spotreba vzduchu nasávanie (L/min) | max. schopnosť nasávania (L/min) | Dĺžka (mm) | Prevádzkový tlak (bar) |
|---|---|---|---|---|---|---|---|---|---|
| **K- 07 45 01 29** | 0,7 | M 5 male | G 1/4 IG | G1/8 female | 90 % | 21,0 | 14,0 | 35,0 | 5,0 |
| **K- 07 45 01 30** | 0,9 | M 5 male | G 1/4 IG | G1/8 female | 89 % | 36,0 | 21,0 | 35,0 | 5,0 |