


K-DRV

Unidirectional flow control valves

Vlastnosti

Prevádzkový tlak	max. 10 bar
Prevádzková teplota	max. +70 °C
Tesniaci materiál	NBR
Kryt	Alu eloxed
vnútorné diely	Brass

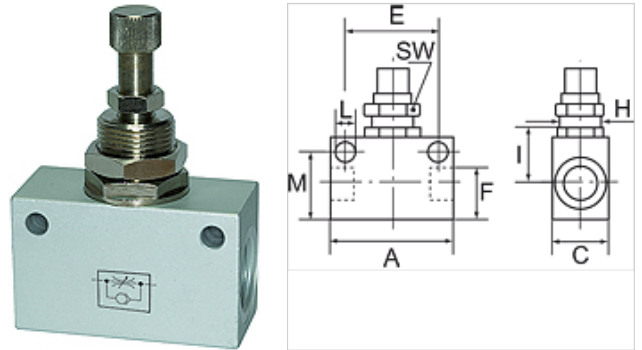

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

These valves are restricted in the flow direction and have free passage in the opposite direction.

Výrobok

Označenie	Závit	A: (mm)	C (mm)	E (mm)	Rozmer H	I (mm)	D (mm)	M (mm)	SW (mm)
K- 07 30 12 36	M 5	25,0	12,0	18,0	M 9 x 0.75 mm	10,0	3,2	12,2	11
K- 07 30 12 37	G 1/8	34,0	16,0	24,0	M 12 x 0.75 mm	15,0	4,5	16,4	15
K- 07 30 12 38	G 1/4	50,0	25,0	35,0	M 18 x 1.5 mm	24,0	6,5	23,8	22
K- 07 30 12 39	G 3/8	58,0	25,0	40,0	M 18 x 1.5 mm	24,0	6,5	25,3	22
K- 07 30 12 40	G 1/2	65,0	30,0	50,0	M 22 x 1.5 mm	29,0	6,5	33,0	26