
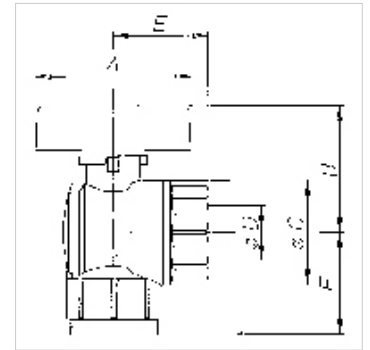


# K-BKR ECKFORM IG AG 1

Ball valves, angle type, female/female thread

## Vlastnosti

<b>Oblasť použitia</b>	Gas, compressed air, water, oil, weak alkaline solutions
<b>Prevádzkový tlak</b>	Liquids: 40/32 bar depending on the port size; Gas: max. 5 bar (MOP 5)
<b>Prevádzková teplota</b>	-15 °C to +100 °C for liquids; -15 °C to +60 °C for gas
<b>Popis závitů</b>	R or RP thread acc. to ISO 7-1
<b>kryt, vnútorné diely</b>	Nickel-plated brass
<b>páka</b>	Aluminium, painted yellow
<b>Tesnenie gule</b>	PTFE
<b>Tesnenie vretena</b>	NBR



## Poznámka

Ďalšie údaje na vyžiadanie.

## Výrobok

Označenie	DN	Závit	PN (bar)	A: (mm)	B (mm)	Ø C (mm)	E (mm)	F (mm)
K- 07 30 20 42	15	Rp 1/2	40	47,0	38,0	31,0	31,0	33,0
K- 07 30 20 43	20	Rp 3/4	40	56,0	46,0	39,0	35,0	38,0
K- 07 30 20 44	25	Rp 1	40	56,0	50,0	48,0	42,0	46,0