


K-BKR FEINEINSTELLUNG

Ball valves

HANSA FLEX

Vlastnosti

Prevádzkový tlak	Max. 40 bar
Prevádzková teplota	-15 °C to +100 °C
Popis závitu	G thread acc. DIN EN ISO 228-1
Kryt	Nickel-plated brass (outside); Brass with a bare metal surface (inside)
ručné koleso	Plastic
guľa	Chrome-plated brass
Tesnenie gule	PTFE
Tesnenie vretena	NBR

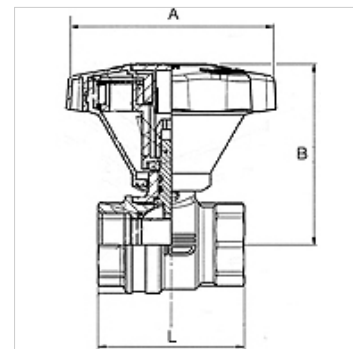

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Brass ball valves in the standard series with fine adjustment. Unlike our classic standard ball valves (open-close function), this model features a special stem technology that allows finely modulated opening and closing of the line. The flow rate can be regulated extremely precisely as a result. The cock is made of low-lead brass with a bare brass surface on the inside. It is thus safe to use with drinking water. This valve complies with the European standard EN 13828 and the working paper DVGW W 570.

Výrobok

Označenie	DN	Závit	A: (mm)	B (mm)	D (mm)
K- 07 30 00 41	10	G 3/8	83,0	63,0	43,4
K- 07 30 00 42	15	G 1/2	83,0	70,0	50,1
K- 07 30 00 43	20	G 3/4	83,0	76,0	58,0
K- 07 30 00 44	25	G 1	83,0	80,0	68,8
K- 07 30 00 45	32	G 1 1/4	130,0	110,0	81,0
K- 07 30 00 46	40	G 1 1/2	130,0	116,0	93,2
K- 07 30 00 47	50	G 2	130,0	123,0	110,2