
K-3 BKR T DOPPELWIRKEND T1

Stainless steel ball valves, 3-way, with double-acting actuator, T-bore, normal position T1

Vlastnosti

Konštrukcia	Pneumatic actuators, in double- or single acting version, with integrated end-position feedback
Otvor	Tvar T
Prevádzkový tlak	max. 63 bar (depending on temperature and nominal size)
Prevádzková teplota	-20 °C to +70 °C
Uhol otočenia	90 °
Normované rozhrania	Interface actuator / valve: four or eight threaded holes in the drive housing according to EN ISO 5211, Interface actuator / S
Riadiaci tlak	5.5 bar
Adaptér ventila	Acc. to NAMUR
pohon	aluminium eloxed
tesnenie pohonu	NBR
guľový kohút	Stainless steel 1.4401,with ISO-flange plate
Tesnenie guľového kohúta	PTFE/FKM



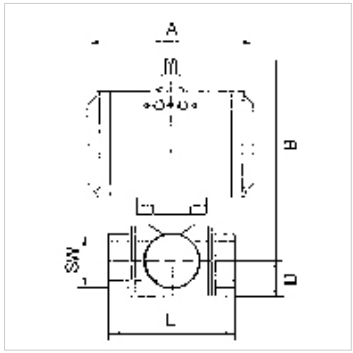

Poznámka

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Ďalšie údaje na vyžiadanie.

Popis

3-way cock, reduced bore

Dodatočné informácie

Other T-positions on request

Výrobok

Označenie	DN	Závit	Poloha	A: (mm)	B (mm)	D: (mm)	D (mm)	SW (mm)
K- 07 30 02 99	15	Rp 1/2	T 1	116,0	130,0	20,0	73,0	27
K- 07 30 03 01	20	Rp 3/4	T 1	116,0	136,0	23,0	80,0	32
K- 07 30 03 03	25	Rp 1	T 1	133,0	148,5	28,5	90,0	41
K- 07 30 03 05	32	Rp 1 1/4	T 1	133,0	153,5	36,5	90,0	50
K- 07 30 03 07	40	Rp 1 1/2	T 1	137,0	173,0	37,0	105,0	55
K- 07 30 03 09	50	Rp 2	T 1	161,0	196,5	47,5	115,0	71

Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.