



K-MV G 230 V, 50 - 60 HZ D

Normally closed, 230 V, 50 to 60 Hz, directly operated

HANSA FLEX

Vlastnosti

Elektrické pripojenie	For Pg 11P connector socket, acc. to DIN 4400
Krytie	IP65 (with connector socket fitted)
Teplota média	max. +90 °C with Perbunan-seal; max. +130 °C with FKM-Seal
kryt, sedlo ventíla	Stainless steel
vnútorné diely	Stainless steel
tesnenie	Perbunan (NBR) or FKM

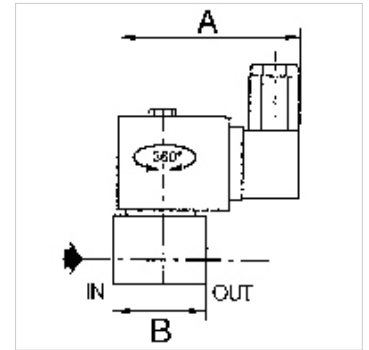

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Available versions, Directly operated, Combined operation

Výrobok

Označenie	Závit	max. prevádzkový tlak (bar)	MS	Tesniaci materiál	A: (mm)	B: (mm)	vyhotovenie
K- 07 30 22 46	G 1/8	20	2,4	NBR	80,0	30,0	1
K- 07 30 22 48	G 1/8	20	2,4	FKM	80,0	30,0	1
K- 07 30 22 47	G 1/4	12	4,0	NBR	85,0	45,0	1
K- 07 30 22 49	G 1/4	12	4,0	FKM	85,0	45,0	1