


# K-MV G 230 V, 50 - 60 HZ Z

Normally closed, 230 V, 50 to 60 Hz, combined operation

**HANSA FLEX**

## Vlastnosti

Elektrické pripojenie	For Pg 11P connector socket, acc. to DIN 4400
Krytie	IP65 (with connector socket fitted)
Teplota média	max. +90 °C with Perbunan-seal; max. +130 °C with FKM-Seal
kryt, sedlo ventíla	Stainless steel
vnútorné diely	Stainless steel
tesnenie	Perbunan (NBR) or FKM

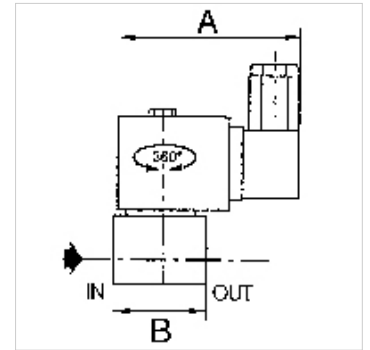

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

Available versions, Directly operated, Combined operation

## Výrobok

Označenie	Závit	max. prevádzkový tlak (bar)	MS	Tesniaci materiál	A: (mm)	B (mm)	vyhotovenie
K- 07 30 22 99	G 1/2	9	16,0	NBR	80,0	71,0	3
K- 07 30 23 01	G 1/2	9	16,0	FKM	80,0	71,0	3
K- 07 30 23 00	G 3/4	9	16,0	NBR	80,0	71,0	3