


# K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## Vlastnosti

Elektrické pripojenie	For Pg 11P connector socket, acc. to ISO 4400
Krytie	IP65 (with connector socket fitted)
Popis závit	Rp thread acc. to ISO 7-1
kryt, sedlo ventila	Brass
vnútorné diely	Stainless steel
tesnenie	Perbunan (NBR)

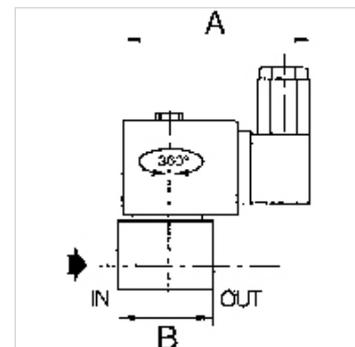

## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Výrobok

Označenie	Závit	max. prevádzkový tlak (bar)	MS	A: (mm)	B: (mm)	vyhotovenie
K- 07 30 22 52	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 22 53	Rp 1/4	6	3,2	80,0	43,0	10