



K-MV 3/2 230 V, 50 - 60 HZ

3/2-way solenoid valves, normally closed, directly operated, 230 V, 50 to 60 Hz

HANSA FLEX

Vlastnosti

Elektrické pripojenie	For Pg 11P connector socket, acc. to ISO 4400
Krytie	IP65 (with connector socket fitted)
Popis závit	Rp thread acc. to ISO 7-1
kryt, sedlo ventila	Brass
vnútorné diely	Stainless steel
tesnenie	Perbunan (NBR)

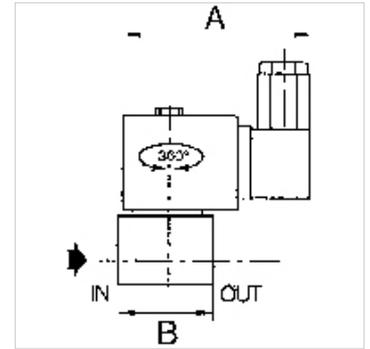

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Výrobok

Označenie	Závit	max. prevádzkový tlak (bar)	MS	A: (mm)	B: (mm)	vyhotovenie
K- 07 30 22 52	Rp 1/8	7	2,4	75,0	30,0	7
K- 07 30 22 53	Rp 1/4	6	3,2	80,0	43,0	10