


# K-SSV BR

Angle-seat valves with piston actuator

**HANSA FLEX**

## Vlastnosti

|                               |   |
|-------------------------------|---|
| Rozdielový tlak               | 0 - 16 bar  |
| Teplota média                 | -10 °C to +180 °C   |
| Pripojenie riadiaceho vzduchu | G 1/8   |
| Teplota riadiaceho média      | max. +60 °C   |
| Teplota okolia                | -20 °C to +70 °C  |
| dovolený statický tlak        | Max. 16 bar   |
| kryt ventila                  | Bronze  |
| spojovací kus                 | Stainless steel   |
| Riadiaca hlava                | Polyamide (glass fibre-reinforced)                                  |
| Piest                         | Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50) |
| Vreteno                       | Stainless steel   |
| Tesniaci materiál             | PTFE  |

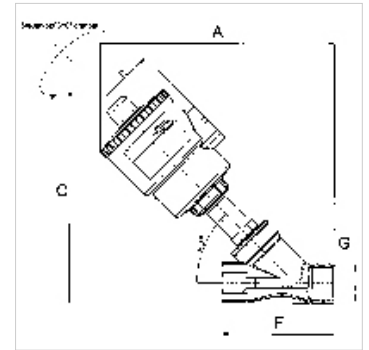

## Poznámka

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Ďalšie údaje na vyžiadanie.

## Popis

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

## Dodatočné informácie

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

## Výrobok

| Označenie      | A:<br>(mm) | C<br>(mm) | F<br>(mm) | Závit   | max. prevádzkový rozdiel tlakov<br>(bar) | min. riadiaci tlak | max. riadiaci tlak |
|----------------|------------|-----------|-----------|---------|--|--------------------|--------------------|
| K- 07 30 25 24 | 163,0      | 153,0     | 65,0      | G 1/2   | 16                                       | 4                  | 10                 |
| K- 07 30 25 25 | 173,0      | 163,0     | 75,0      | G 3/4   | 10                                       | 4                  | 10                 |
| K- 07 30 25 26 | 191,0      | 181,0     | 75,0      | G 3/4   | 16                                       | 4                  | 10                 |
| K- 07 30 25 27 | 206,0      | 196,0     | 90,0      | G 1     | 11                                       | 4                  | 10                 |
| K- 07 30 25 28 | 246,0      | 236,0     | 90,0      | G 1     | 16                                       | 4                  | 8                  |
| K- 07 30 25 29 | 255,0      | 245,0     | 110,0     | G 1 1/4 | 14                                       | 4                  | 8                  |
| K- 07 30 25 30 | 270,0      | 264,0     | 120,0     | G 1 1/2 | 11                                       | 4                  | 8                  |
| K- 07 30 25 31 | 306,0      | 300,0     | 120,0     | G 1 1/2 | 16                                       | 4                  | 8                  |
| K- 07 30 25 32 | 316,0      | 311,0     | 150,0     | G 2     | 10                                       | 4                  | 8                  |