



K-T-STUECKE AG 1 2

Tees, male-male-male

HANSA FLEX

Vlastnosti

| | |
|---------------------|-----------------------|
| Prevádzkový tlak | 60 bar |
| Prevádzková teplota | Max. 150 °C |
| Materiál | Mosadzný poniklovaný |
| Vonkajší závit | conical acc. DIN 2999 |

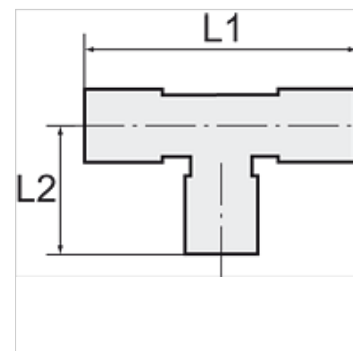

Poznámka

Ďalšie údaje na vyžiadanie.

Výrobok

| Označenie | Závit | L1 (mm) | L2 (mm) | SW |
|----------------|-------|------------|------------|-------|
| K- 07 40 10 98 | R 1/8 | 37,0 | 18,5 | 10 mm |
| K- 07 40 10 99 | R 1/4 | 47,0 | 23,5 | 13 mm |
| K- 07 40 11 00 | R 3/8 | 52,0 | 26,0 | 17 mm |
| K- 07 40 11 01 | R 1/2 | 62,0 | 31,0 | 21 mm |
| K- 07 40 11 02 | R 3/4 | 66,4 | 33,0 | 25 mm |
| K- 07 40 11 03 | R 1 | 78,0 | 39,0 | 30 mm |