

# K-T-STUECKE AG 1 2

Tees, male-male-male

**HANSA FLEX**



## Vlastnosti

Prevádzkový tlak 60 bar

Prevádzková teplota Max. 150 °C

Materiál Mosadzný poniklovaný

Vonkajší závit conical acc. DIN 2999

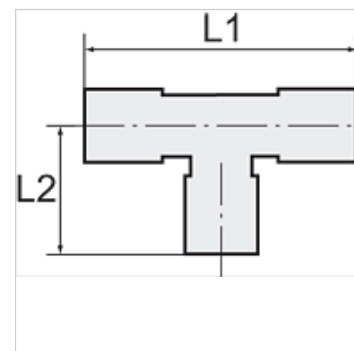

## Poznámka

Ďalšie údaje na vyžiadanie.

## Výrobok

| Označenie      | Závit | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|-------|------------|------------|-------|
| K- 07 40 10 98 | R 1/8 | 37,0       | 18,5       | 10 mm |
| K- 07 40 10 99 | R 1/4 | 47,0       | 23,5       | 13 mm |
| K- 07 40 11 00 | R 3/8 | 52,0       | 26,0       | 17 mm |
| K- 07 40 11 01 | R 1/2 | 62,0       | 31,0       | 21 mm |
| K- 07 40 11 02 | R 3/4 | 66,4       | 33,0       | 25 mm |
| K- 07 40 11 03 | R 1   | 78,0       | 39,0       | 30 mm |