


# K-VSTOK 6

Plugs, hexagonal

**HANSA FLEX**

## Vlastnosti

|                |                              |
|----------------|------------------------------|
| Pracovný tlak  | Max. 20 bar                  |
| Vonkajší závit | Parallel to DIN EN ISO 228-1 |
| Materiál       | Stainless steel 1.4408       |

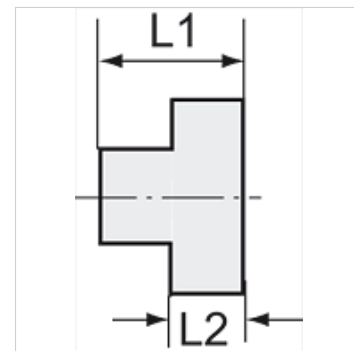

## Poznámka

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Ďalšie údaje na vyžiadanie.

## Výrobok

| Označenie      | Závit   | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|------------|------------|-------|
| K- 07 40 39 82 | G 1/8   | 17,3       | 6,3        | 12 mm |
| K- 07 40 39 83 | G 1/4   | 18,3       | 6,2        | 17 mm |
| K- 07 40 39 84 | G 3/8   | 19,3       | 6,0        | 21 mm |
| K- 07 40 39 85 | G 1/2   | 22,2       | 6,0        | 26 mm |
| K- 07 40 39 86 | G 3/4   | 25,2       | 6,8        | 31 mm |
| K- 07 40 39 87 | G 1     | 27,0       | 7,3        | 38 mm |
| K- 07 40 39 88 | G 1 1/4 | 30,2       | 7,7        | 46 mm |
| K- 07 40 39 89 | G 1 1/2 | 32,4       | 8,8        | 53 mm |
| K- 07 40 39 90 | G 2     | 36,0       | 10,0       | 63 mm |