
# K-INLINE-DRG IG M SEKUNDAERENTLUEFT

Inline pressure regulators, 2 x female thread, self-relieving

## Vlastnosti

| | |
|---|---|
| **Prevádzkový tlak** | Max. 25 bar |
| **Rozsah teplôt** | 0 °C to +80 °C |
| **Kryt** | Aluminium |
| **ostatné diely** | Stainless steel, nitrile rubber, brass |



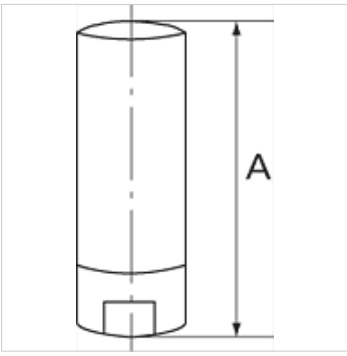


## Poznámka

Ďalšie údaje na vyžiadanie.

## Popis

The majority of pneumatic tools are connected directly to the compressed air supply by means of a quick disconnect coupling, in other words they tend to be supplied with a higher pressure than is actually required. Which increases consumption and leads to tool overload. Added safety is provided by the automatic self-relieving function. If the tool is disconnected from the hose, it continues to work for a short period, even though it has been switched off, owing to the residual pressure that is present on the tool side. <br>Inadvertent operation of the tool can thus lead to serious injuries to the user (tackers or nail drivers can fire up to another ten shots). <br>This effect can be prevented by using the inline pressure regulators, which have a preset pressure determined by the application, thereby achieving energy efficiency and economy.

## Výrobok

| Označenie | Závit | Pracovný tlak prednastavený | Prietok | A: (mm) | SW (mm) |
|---|---|---|---|---|---|
| **K- 07 25 02 83** | G 1/4 | 2 bar | 600 - 800 l/min | 56,6 | 16 |
| **K- 07 25 02 84** | G 1/4 | 3 bar | 600 - 800 l/min | 56,6 | 16 |
| **K- 07 25 02 85** | G 1/4 | 4 bar | 600 - 800 l/min | 56,6 | 16 |
| **K- 07 25 02 86** | G 1/4 | 5 bar | 600 - 800 l/min | 56,6 | 16 |
| **K- 07 25 02 87** | G 1/4 | 6 bar | 600 - 800 l/min | 56,6 | 16 |
| **K- 07 25 02 88** | G 1/4 | 8 bar | 600 - 800 l/min | 56,6 | 16 |
| **K- 07 25 02 89** | G 3/8 | 2 bar | 2000 l/min | 63,0 | 22 |
| **K- 07 25 02 90** | G 3/8 | 4 bar | 2000 l/min | 63,0 | 22 |
| **K- 07 25 02 91** | G 3/8 | 6 bar | 2000 l/min | 63,0 | 22 |
| **K- 07 25 02 92** | G 3/8 | 8 bar | 2000 l/min | 63,0 | 22 |
| **K- 07 25 02 93** | G 1/2 | 2 bar | 3000 l/min | 67,5 | 27 |
| **K- 07 25 02 94** | G 1/2 | 4 bar | 3000 l/min | 67,5 | 27 |
| **K- 07 25 02 95** | G 1/2 | 6 bar | 3000 l/min | 67,5 | 27 |
| **K- 07 25 02 96** | G 1/2 | 8 bar | 3000 l/min | 67,5 | 27 |

*Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.*