


K-GE AGR-K

Male stud couplings, polyamide, conical male thread acc. to ISO 7-1

HANSA FLEX

Vlastnosti

Rozsah teplôt -40 °C to +90 °C

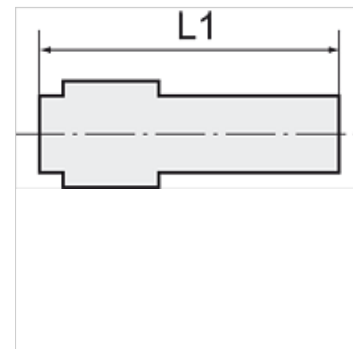

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Lightweight tube connectors distinguished by high strength, toughness, resistance to abrasion and impact resistance. Resistant to: Acetone, benzene, benzene, butane, alcohols, diesel fuels, crude oil, natural gas, ethanol, fruit juices, glycerine, fuel oil, hydraulic fluids, aliphatic ketones, carbon dioxide, carbonic acid, engine oils, methanol, propane, liquefied gas, lubricating oils, lubricating greases, town gas, washing liquor and water.

Výrobok

Označenie	Závit	pre hadicu	L1 (mm)	max. dovolený pretlak (bar)	SW
K- 07 40 16 63	M 5	LW 3 mm	19,5	10	6 mm
K- 07 40 16 64	R 1/8	LW 4 mm	27,0	10	10 mm
K- 07 40 16 65	R 1/8	LW 6 mm	32,5	10	10 mm
K- 07 40 16 66	R 1/8	LW 8 mm	38,0	10	14 mm
K- 07 40 16 67	R 1/4	LW 4 mm	32,0	10	14 mm
K- 07 40 16 68	R 1/4	LW 5 mm	36,0	10	14 mm
K- 07 40 16 69	R 1/4	LW 6 mm	37,5	10	14 mm
K- 07 40 16 70	R 1/4	LW 8 mm	41,0	10	14 mm
K- 07 40 16 71	R 1/4	LW 10 mm	43,5	10	14 mm
K- 07 40 16 72	R 3/8	LW 6 mm	39,0	10	17 mm
K- 07 40 16 73	R 3/8	LW 8 mm	41,0	10	17 mm
K- 07 40 16 74	R 3/8	LW 10 mm	43,5	10	17 mm
K- 07 40 16 75	R 3/8	LW 12 mm	45,5	10	17 mm
K- 07 40 16 76	R 1/2	LW 8 mm	49,0	10	22 mm
K- 07 40 16 77	R 1/2	LW 12 mm	54,0	10	22 mm
K- 07 40 16 78	R 1/2	LW 16 mm	58,0	10	22 mm
K- 07 40 46 50	R 3/4	LW 16 mm	58,0	10	27 mm
K- 07 40 46 51	R 3/4	LW 19 mm	58,0	10	27 mm
K- 07 40 46 52	R 1	LW 25 mm	69,0	10	32 mm