



# K-XV AGM 2

Double nipples, parallel male thread

**HANSA FLEX**

## Vlastnosti

|                |                                 |
|----------------|---------------------------------|
| Pracovný tlak  | 10 bar                          |
| Teplota média  | max. +90 °C                     |
| Teplota okolia | Max. +90 °C                     |
| Materiál       | Brass with a bare metal surface |

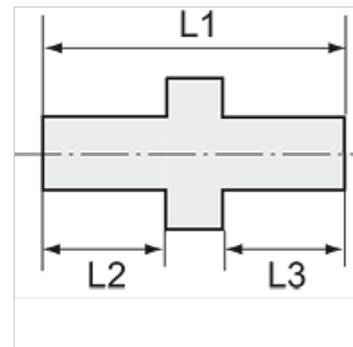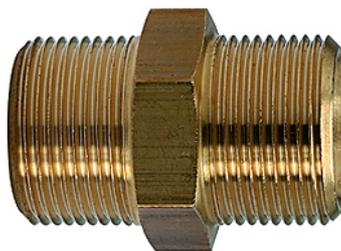

## Poznámka

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Ďalšie údaje na vyžiadanie.

## Dodatočné informácie

Further types and dimensions on request.

## Výrobok

| Označenie      | Závit 1    | Závit 2    | L1<br>(mm) | L2<br>(mm) | L3<br>(mm) | SW    |
|----------------|------------|------------|------------|------------|------------|-------|
| K- 07 35 11 26 | M 14 x 1.5 | M 14 x 1.5 | 23,0       | 9,0        | 9,0        | 17 mm |
| K- 07 35 11 27 | M 16 x 1.5 | M 16 x 1.5 | 23,0       | 9,0        | 9,0        | 19 mm |
| K- 07 35 11 28 | M 24 x 1.5 | M 24 x 1.5 | 40,0       | 16,0       | 16,0       | 27 mm |
| K- 07 40 00 04 | M 5        | M 5        | 13,0       | 5,0        | 5,0        | 7 mm  |
| K- 07 40 00 05 | M 5        | G 1/8      | 17,0       | 5,0        | 7,0        | 14 mm |
| K- 07 40 00 06 | M 5        | G 1/4      | 21,0       | 7,0        | 9,0        | 17 mm |
| K- 07 40 00 01 | G 1/8      | G 1/8      | 21,0       | 8,0        | 8,0        | 14 mm |
| K- 07 40 00 02 | G 1/8      | G 1/4      | 22,0       | 9,0        | 8,0        | 17 mm |
| K- 07 40 00 03 | G 1/8      | G 3/8      | 25,0       | 9,0        | 11,0       | 19 mm |
| K- 07 40 00 07 | G 1/4      | G 1/4      | 23,0       | 9,0        | 9,0        | 17 mm |
| K- 07 40 00 31 | G 1/4 ccw  | G 1/4 ccw  | 25,0       | 10,0       | 10,0       | 17 mm |
| K- 07 40 00 08 | G 1/4      | G 3/8      | 24,0       | 9,0        | 10,0       | 19 mm |
| K- 07 40 00 09 | G 1/4      | G 1/2      | 29,0       | 11,0       | 12,0       | 24 mm |
| K- 07 40 00 10 | G 3/8      | G 3/8      | 25,0       | 10,0       | 10,0       | 19 mm |
| K- 07 40 00 32 | G 3/8 ccw  | G 3/8 ccw  | 37,0       | 13,5       | 13,5       | 19 mm |
| K- 07 40 00 11 | G 3/8      | G 1/2      | 27,0       | 10,0       | 12,0       | 24 mm |
| K- 07 40 00 12 | G 3/8      | G 3/4      | 36,0       | 12,0       | 16,0       | 32 mm |
| K- 07 40 00 13 | G 1/2      | G 1/2      | 29,0       | 12,0       | 12,0       | 24 mm |
| K- 07 40 00 14 | G 1/2      | G 3/4      | 33,0       | 12,0       | 12,0       | 32 mm |
| K- 07 40 00 15 | G 1/2      | G 1        | 40,0       | 16,0       | 16,0       | 36 mm |
| K- 07 40 00 16 | G 3/4      | G 3/4      | 33,0       | 12,0       | 12,0       | 32 mm |
| K- 07 40 00 17 | G 3/4      | G 1        | 40,0       | 16,0       | 16,0       | 36 mm |
| K- 07 40 00 18 | G 1        | G 1        | 42,5       | 17,0       | 17,0       | 36 mm |
| K- 07 40 00 19 | G 1        | G 1 1/4    | 32,0       | 14,0       | 12,0       | 42 mm |
| K- 07 40 00 20 | G 1        | G 1 1/2    | 39,0       | 14,5       | 14,5       | 50 mm |
| K- 07 40 44 36 | G 1        | G 2        | 42,0       | 18,0       | 15,0       | 60 mm |
| K- 07 40 00 21 | G 1 1/4    | G 1 1/4    | 39,0       | 16,0       | 16,0       | 42 mm |
| K- 07 40 00 22 | G 1 1/4    | G 1 1/2    | 40,5       | 15,0       | 18,0       | 50 mm |
| K- 07 40 44 37 | G 1 1/4    | G 2        | 43,0       | 29,5       | 29,5       | 60 mm |
| K- 07 40 00 23 | G 1 1/2    | G 1 1/2    | 50,0       | 20,0       | 20,0       | 50 mm |
| K- 07 40 00 24 | G 1 1/2    | G 2        | 43,0       | 17,0       | 17,0       | 62 mm |
| K- 07 40 00 25 | G 2        | G 2        | 50,0       | 20,0       | 20,0       | 62 mm |
| K- 07 40 44 38 | G 2        | G 2 1/2    | 54,0       | 24,0       | 19,0       | 77 mm |
| K- 07 40 44 39 | G 2        | G 3        | 50,0       | 20,0       | 20,0       | 89 mm |
| K- 07 40 44 40 | G 2 1/2    | G 2 1/2    | 59,0       | 24,0       | 24,0       | 77 mm |
| K- 07 40 44 41 | G 2 1/2    | G 3        | 52,5       | 20,0       | 22,5       | 89 mm |
| K- 07 40 44 42 | G 3        | G 3        | 60,0       | 24,5       | 24,5       | 89 mm |