


# K-SCHLAUCHTUELLEN MS

Hose fittings

**HANSA FLEX**

## Vlastnosti

|                |             |
|----------------|-------------|
| Pracovný tlak  | 10 bar      |
| Teplota média  | max. +90 °C |
| Teplota okolia | Max. +90 °C |
| Materiál       | Mosadz      |

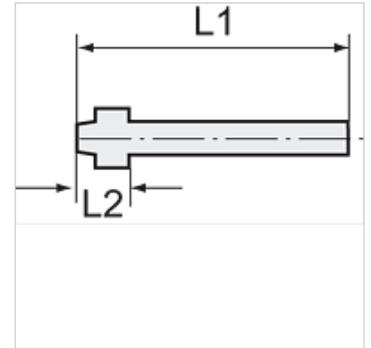

## Poznámka

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Ďalšie údaje na vyžiadanie.

## Dodatočné informácie

Further types and dimensions on request.

## Výrobok

| Označenie      | pre hadicu | pre presuvnú maticu | L1<br>(mm) | L2<br>(mm) |
|----------------|------------|---------------------|------------|------------|
| K- 07 40 16 61 | LW 4 mm    | G 1/8               | 47,0       | 12,0       |
| K- 07 40 16 52 | LW 4 mm    | G 1/4               | 47,0       | 13,5       |
| K- 07 40 16 54 | LW 9 mm    | G 1/4               | 47,0       | 13,5       |
| K- 07 40 16 55 | LW 4 mm    | G 3/8               | 48,5       | 15,0       |
| K- 07 40 16 58 | LW 6 mm    | G 1/2               | 48,5       | 15,0       |
| K- 07 40 16 60 | LW 13 mm   | G 1/2               | 48,5       | 15,0       |