


K-SCHLAUCHTUELLEN MS

Hose fittings

HANSA FLEX

Vlastnosti

| | |
|----------------|-------------|
| Pracovný tlak | 10 bar |
| Teplota média | max. +90 °C |
| Teplota okolia | Max. +90 °C |
| Materiál | Mosadz |

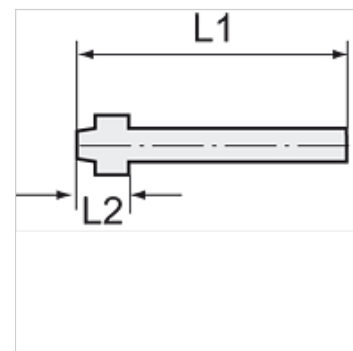

Poznámka

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Ďalšie údaje na vyžiadanie.

Dodatočné informácie

Further types and dimensions on request.

Výrobok

| Označenie | pre hadicu | pre presuvnú maticu | L1 (mm) | L2 (mm) |
|----------------|------------|---------------------|------------|------------|
| K- 07 40 16 61 | LW 4 mm | G 1/8 | 47,0 | 12,0 |
| K- 07 40 16 52 | LW 4 mm | G 1/4 | 47,0 | 13,5 |
| K- 07 40 16 54 | LW 9 mm | G 1/4 | 47,0 | 13,5 |
| K- 07 40 16 55 | LW 4 mm | G 3/8 | 48,5 | 15,0 |
| K- 07 40 16 58 | LW 6 mm | G 1/2 | 48,5 | 15,0 |
| K- 07 40 16 60 | LW 13 mm | G 1/2 | 48,5 | 15,0 |