



K-VTL KUGELHAEBNE

Distributor block

HANSA FLEX

Vlastnosti

| | |
|---------------------------|--|
| Upevnenie | 2 mounting holes in housing (screw size M 5) |
| Rozsah tlaku | Max. +10 bar, rough vacuum |
| Rozsah teplôt | -10 °C to +100 °C |
| Závit guľový kohút | G 1/4 |
| Kryt | Die-cast aluminium |
| guľa, vreteno | Ms 58, chrome-plated |
| Tesnenie gule | PTFE |
| O-krúžok | NBR |

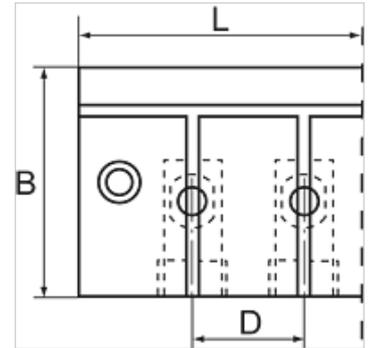

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Výrobok

| Označenie | Počet guľových kohútov | Výstup závitů | Vstup závitů | B (mm) | D: (mm) | D (mm) |
|----------------|------------------------|---------------|--------------|-----------|------------|-----------|
| K- 07 40 40 46 | 6 | G 3/8 | G 3/8" | 52,0 | 25,0 | 175,0 |
| K- 07 40 40 47 | 8 | G 3/8 | G 3/8" | 52,0 | 25,0 | 225,0 |
| K- 07 40 40 45 | 10 | G 3/8 | G 3/8" | 52,0 | 25,0 | 275,0 |