



# K-DRGREDV

## Pressure reducing valves

**HANSA FLEX**

### Vlastnosti

Vstupný tlak	Max. 15 bar
Prípojka	G 1/4 internal / external
Materiál	Mosadz

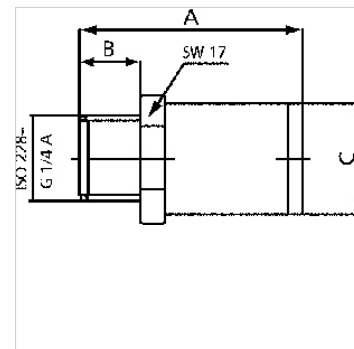

### Poznámka

Dependent on the input pressure P1, the initial pressure P2 can vary between -20% to +20%

Ďalšie údaje na vyžiadanie.

### Popis

Industry, trade and repair shops often require working pressures of 15 bar or less. These pressure reducing valves, which are screwed directly onto the tool, enable the actually necessary working pressure to be set. <br>Benefits: Significantly reduced risk of accidents, Longer tool life with fewer malfunctions, Lower noise levels at the workplace.

### Výrobok

Označenie	Tlak nastavenia	max. prietok (L/min)	A: (mm)	B	Ø C (mm)	SW (mm)
K- 07 25 19 31	2,0	300	34,0	9,0 mm	17,0	17
K- 07 25 02 00	3,0	360	34,0	9,0 mm	17,0	17
K- 07 25 02 01	4,0	380	34,0	9,0 mm	17,0	17
K- 07 25 02 02	5,0	390	34,0	9,0 mm	17,0	17
K- 07 25 02 03	6,0	405	34,0	9,0 mm	17,0	17
K- 07 25 19 32	7,0	415	34,0	9,0 mm	17,0	17
K- 07 25 19 33	8,0	420	34,0	9,0 mm	17,0	17