


K-GROSSDRUCKREGLER

Large pressure regulators

HANSA FLEX

Vlastnosti

Vstupný tlak	Max. 40 bar
Teplota média	max. 60 °C
Teplota okolia	Max. 90 °C
Prietok	2500 l/min
Tesniaci materiál	NBR
Kryt	Aluminium
Meranie prietochného množstva	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

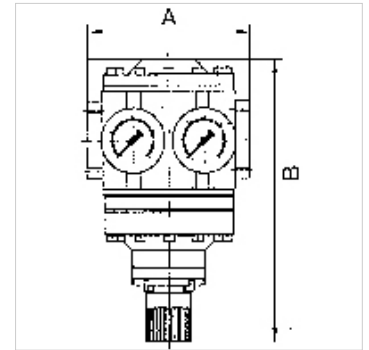

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Diaphragm pressure regulators, independent of inlet pressure, with internal pilot control and self-relieving design. Separate indication of input and working pressure on two pressure gauges. The pressure setting can be locked by pushing the button down. We recommend always using these controllers in conjunction with our K-07250615 and K-07250615 filters.

Výrobok

Označenie	Závit	Rozsah regulácie	A: (mm)	B	DN
K- 07 25 08 11	G 1 1/2	0.5 - 6 bar	180,0	246,0 mm	50
K- 07 25 08 12	G 1 1/2	0.5 - 10 bar	180,0	246,0 mm	50
K- 07 25 08 13	G 1 1/2	0.5 - 16 bar	180,0	246,0 mm	50
K- 07 25 08 14	G 1 1/2	0.5 - 25 bar	180,0	246,0 mm	50
K- 07 25 08 15	G 2	0.5 - 6 bar	160,0	246,0 mm	50
K- 07 25 08 16	G 2	0.5 - 10 bar	160,0	246,0 mm	50
K- 07 25 08 17	G 2	0.5 - 16 bar	160,0	246,0 mm	50
K- 07 25 08 18	G 2	0.5 - 25 bar	160,0	246,0 mm	50

Náhradné diely

K-HALTERBAUSATZ	Holder
K-VERSCHLEI-SATZ	Set of wearing parts
K-XV AGM 2	Double nipples, parallel male thread