


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Vlastnosti

Vstupný tlak	Max. 30 bar
Teplota média	max. 130 °C
Teplota okolia	Max. 60 °C
Prietok	2500 l/min
Veľkosť pórov vo filtračnej vložke	50 µm
Tesniaci materiál	FKM
Membrána	PTFE on NBR base
Materiál	stainless steel 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Meranie prietochového množstva	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

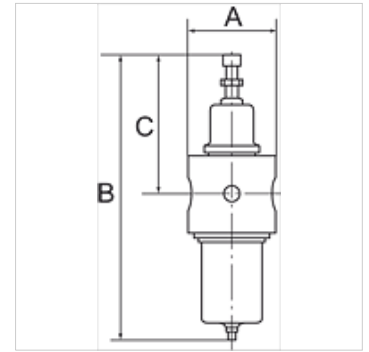

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Pokyny pre objednanie

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Výrobok

Označenie	Závit	Rozsah regulácie	A: (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

Náhradné diely

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts