


K-3/2-BKR HANSA

Ball valves

HANSA FLEX

Vlastnosti

| | |
|---------------------------|---|
| Vstupný tlak | 0 - 16 bar |
| Rozsah teplôt | -10 °C to +50 °C |
| Médiá | Tlakový vzduch |
| Pripojovací závit | Material: Die-cast zinc |
| Kryt | Material: Grivory® (PA 66) |
| Meranie prietoku množstva | At P2 = 6 bar, pressure drop $\Delta p = 1$ bar |

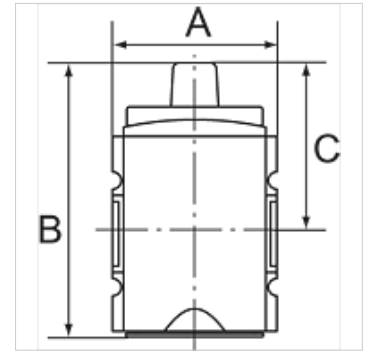

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Closable ball valve in 3/2-way design, mechanically actuated. Toggle 90° rotatable and with switch position indicator: Traverse: Inlet port blocked - outlet port exhausted

Longitudinal: Inlet port and outlet port connected - exhaust blocked. Exhaust air can be collected.

Dodatočné informácie

The price does not include a padlock. Please order separately.

Výrobok

| Označenie | Závit | Odbočka | Prietok (L/min) | A: (mm) | B | C (mm) |
|----------------|-------|---------|-----------------|---------|----------|--------|
| K- 07 25 11 23 | G 1/4 | 1/4 | 1900 | 52,0 | 87,5 mm | 54,5 |
| K- 07 25 11 24 | G 3/8 | 1/4 | 1900 | 52,0 | 87,5 mm | 54,5 |
| K- 07 25 11 43 | G 3/8 | 1/2 | 11000 | 63,0 | 127,0 mm | 70,5 |
| K- 07 25 11 44 | G 1/2 | 1/2 | 11000 | 63,0 | 127,0 mm | 70,5 |
| K- 07 25 11 45 | G 3/4 | 3/4 | 25000 | 85,0 | 144,7 mm | 93,7 |
| K- 07 25 11 46 | G 1 | 3/4 | 25000 | 85,0 | 144,7 mm | 93,7 |

Príslušenstvo

K-VORHAENGESCHLOSS Padlock

Náhradné diely

K-HALTERBAUSATZ HANSA Holder HANSA