


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Vlastnosti

Vstupný tlak	1.5 - 16 bar
Výstupný tlak	0.5 - 8 bar
Rozsah teplôt	-10 °C to +50 °C
Médiá	Tlakový vzduch
Jemnosť filtra	5,00 µm
Pripojovací závit	Material: Die-cast zinc
Zásobník	Polycarbonate (with bayonet lock)
filtračná vložka	Cellpor (PE)
Kryt	Material: Grivory® (PA 66)
Membrána	NBR
ochranný košík	Polyamide
Vložka kvapkadla	PA
Spotreba vlastného vzduchu	Max. 1.5 l/min (depending on secondary pressure)
Meranie prietoku množstva	At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar

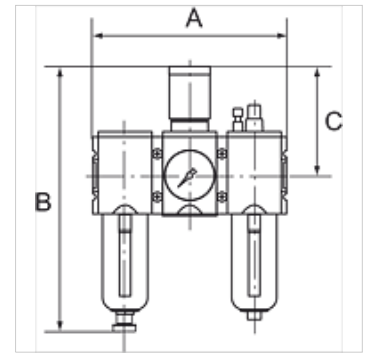

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Pokyny pre objednanie

The price does not include a key lock. Please order separately.

Výrobok

Označenie	Závit	Prietok (L/min)	A: (mm)	B	C (mm)	Vypúšťanie kondenzátu
K- 07 25 14 37	G 1/4	1500	156,0	225,0 mm	95,5	Semi
K- 07 25 14 38	G 3/8	1500	156,0	225,0 mm	95,5	Semi
K- 07 25 14 39	G 3/8	3500	189,0	257,0 mm	110,0	Semi
K- 07 25 14 40	G 1/2	3500	189,0	257,0 mm	110,0	Semi
K- 07 25 14 41	G 3/4	12000	255,0	329,0 mm	137,0	Semi
K- 07 25 14 42	G 1	12000	255,0	329,0 mm	137,0	Semi
K- 07 25 14 43	G 1/4	1500	156,0	243,0 mm	95,5	Auto
K- 07 25 14 44	G 3/8	1500	156,0	243,0 mm	95,5	Auto
K- 07 25 14 45	G 3/8	3500	189,0	274,0 mm	110,0	Auto
K- 07 25 14 46	G 1/2	3500	189,0	274,0 mm	110,0	Auto
K- 07 25 14 47	G 3/4	12000	255,0	343,0 mm	137,0	Auto
K- 07 25 14 48	G 1	12000	255,0	343,0 mm	137,0	Auto

Príslušenstvo

K-STECKSCHLOSS Key lock

Náhradné diely

K-HALTERBAUSATZ HANSA	Holder HANSA
K-ERSATZBEHAELTER HANSA POLY	Spare tank HANSA polycarbonat
K-FILTERELEMENT	Filter element
K-TROPFAUFSATZ HANSA	Drip attachment HANSA
K-SCHALTTAFELMUTTER HANSA	Nut HANSA
K-DICHTSATZ HANSA	Set of seals HANSA