


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Vlastnosti

| | |
|----------------------------|---|
| Vstupný tlak | 1.5 - 16 bar |
| Výstupný tlak | 0.5 - 8 bar |
| Rozsah teplôt | -10 °C to +50 °C |
| Médiá | Tlakový vzduch |
| Jemnosť filtra | 5,00 µm |
| Pripojovací závit | Material: Die-cast zinc |
| Zásobník | Polycarbonate (with bayonet lock) |
| filtračná vložka | Cellpor (PE) |
| Kryt | Material: Grivory® (PA 66) |
| Membrána | NBR |
| ochranný košík | Polyamide |
| Vložka kvapkadla | PA |
| Spotreba vlastného vzduchu | Max. 1.5 l/min (depending on secondary pressure) |
| Meranie prietoku množstva | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

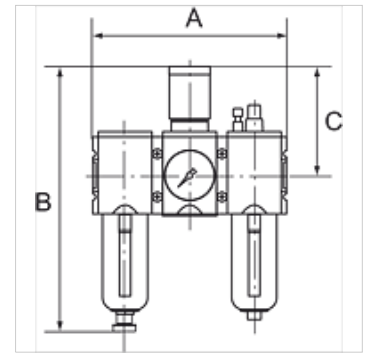

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Pokyny pre objednanie

The price does not include a key lock. Please order separately.

Výrobok

| Označenie | Závit | Prietok (L/min) | A: (mm) | B | C (mm) | Vypúšťanie kondenzátu |
|----------------|-------|-----------------|---------|----------|--------|-----------------------|
| K- 07 25 14 37 | G 1/4 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 38 | G 3/8 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 39 | G 3/8 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 40 | G 1/2 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 41 | G 3/4 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 42 | G 1 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 43 | G 1/4 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 44 | G 3/8 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 45 | G 3/8 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 46 | G 1/2 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 47 | G 3/4 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 14 48 | G 1 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |

Príslušenstvo

K-STECKSCHLOSS Key lock

Náhradné diely

| | |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ HANSA | Drip attachment HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |