


K-FI REGL METALLBEHAE S MANO MULTIF

Filter regulators with metal bowl and sight glass, incl. pressure gauge

HANSA FLEX

Vlastnosti

| | |
|------------------------------------|--|
| Vstupný tlak | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Teplota média | max. 60 °C |
| Teplota okolia | Max. 60 °C |
| Veľkosť pórov vo filtračnej vložke | 5 µm (C55: 40 µm) |
| Tesniaci materiál | NBR |
| kryt pružiny | POM-brass |
| Kryt | Die-cast zinc, Aluminium for G 1 variant |
| Drain valve | Semi-automatic |
| Meranie prietoku množstva | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

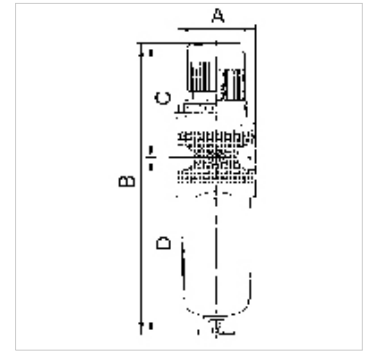

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

Pokyny pre objednanie

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

Výrobok

| Označenie | Závit | Rozsah regulácie | Prietok (L/min) | A: (mm) | B | C (mm) | D: (mm) | DN | Veľkosť |
|----------------|-------|------------------|-----------------|---------|----------|--------|---------|----|---------|
| K- 07 25 00 68 | G 1/4 | 0.5 - 10 bar | 1500 | 47,8 | 192,0 mm | 67,0 | 125,5 | 6 | 1 |
| K- 07 25 00 72 | G 3/8 | 0.5 - 10 bar | 1500 | 47,8 | 192,0 mm | 67,0 | 125,5 | 10 | 1 |
| K- 07 25 00 76 | G 1/2 | 0.5 - 10 bar | 3500 | 68,8 | 246,0 mm | 99,0 | 149,2 | 15 | 2 |
| K- 07 25 00 80 | G 3/4 | 0.5 - 10 bar | 3500 | 68,8 | 246,0 mm | 99,0 | 149,2 | 20 | 2 |
| K- 07 25 00 84 | G 1 | 0.5 - 10 bar | 12000 | 100,0 | 385,0 mm | 128,0 | 255,7 | 25 | 3 |

Náhradné diely

| | |
|----------------------------------|---------------------------|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTTAFELMUTTER | Nut |
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-SCHUTZKORB G | Protective cage |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-FILTERELEMENT | Filter element |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |