


# K-ANFAV MULTIFIX MINI

Start-up valves

**HANSA FLEX**

## Vlastnosti

Vstupný tlak	Min. 2.5 bar, max. 16 bar
Teplota média	max. 60 °C
Teplota okolia	Max. 60 °C
Prietok	1600 l/min
Tesniaci materiál	NBR
Kryt	Die-cast zinc
Meranie prietochného množstva	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

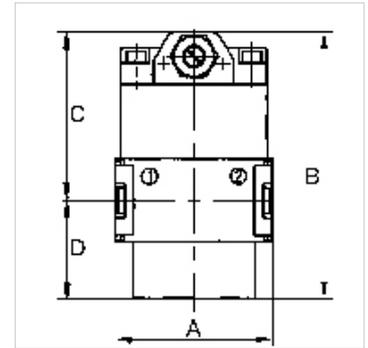

## Poznámka

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

Ďalšie údaje na vyžiadanie.

## Popis

Seat valves operated by secondary pressure for controlled pressurisation of pneumatic systems. The full cross-section of the regulator is opened at 50% of the input pressure. With adjustable restrictor!

## Výrobok

Označenie	Závit	A: (mm)	B	C (mm)	D: (mm)
K- 07 25 11 53	G 1/4	45,0	77,5 mm	48,5	29,0

## Príslušenstvo

K-HALTERBAUSATZ Holder

## Náhradné diely

K-KOPPELPAKET MEHR Coupling packet