


# K-NEBELOEL METALLBEHAEL MULTIFIX MI

Oil-mist lubricators with metal bowl and metal sight dome

**HANSA FLEX**

## Vlastnosti

|                               |  |
|-------------------------------|--|
| Vstupný tlak                  | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Teplota média                 | max. 60 °C   |
| Teplota okolia                | Max. 60 °C   |
| Prietok                       | 1000 l/min   |
| Tesniaci materiál             | NBR  |
| Kryt                          | Die-cast zinc  |
| Vložka kvapkadla              | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)       |
| Druh oleja                    | CL 32 acc. to DIN 51517 - ISO VG 32                        |
| Meranie prietochného množstva | At P2 = 6 bar and pressure drop $\Delta p = 1$ bar         |

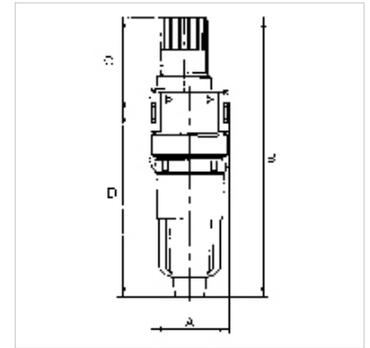

## Poznámka

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.

Ďalšie údaje na vyžiadanie.

## Popis

Micro-lubricators, oil can be filled under pressure.

## Výrobok

| Označenie      | Závit | A:<br>(mm) | B        | C<br>(mm) | D:<br>(mm) | DN | Veľkosť |
|----------------|-------|------------|----------|-----------|------------|----|---------|
| K- 07 25 00 88 | G 1/8 | 40,0       | 147,6 mm | 62,6      | 85,0       | 5  | 0       |
| K- 07 25 00 90 | G 1/4 | 40,0       | 147,6 mm | 62,6      | 85,0       | 5  | 0       |

## Náhradné diely

|                              |  |
|------------------------------|--|
| K-AUTOMAT ABLASSVENTIL       | Automatic drain valve                        |
| K-KOPPELPAKET MEHR           | Coupling packet                              |
| K-ERSATZBEHAELTER MULTI MINI | Spare tank »multifix-mini« & »standard-mini« |
| K-TROPFAUFSATZ POLYCARBO 1   | Drip attachment polycarbonate                |
| K-TROPFAUFSATZ METALL        | Drip attachment metal                        |