


# K-NEBELOELER METALLBEHAE T STANDARD

Oil-mist lubricators with metal bowl and metal sight dome

**HANSA FLEX**

## Vlastnosti

|                           |   |
|---------------------------|---|
| Vstupný tlak              | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl) |
| Teplota média             | max. 60 °C  |
| Teplota okolia            | Max. 60 °C  |
| Tesniaci materiál         | NBR   |
| Kryt                      | Die-cast zinc, painted silver   |
| Vložka kvapkadla          | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)                    |
| Druh oleja                | CL 32 acc. to DIN 51517 - ISO VG 32                                     |
| Meranie prietoku množstva | At P2 = 6 bar and pressure drop $\Delta p = 1$ bar                      |
| Ďalšie údaje              | User manual on request  |

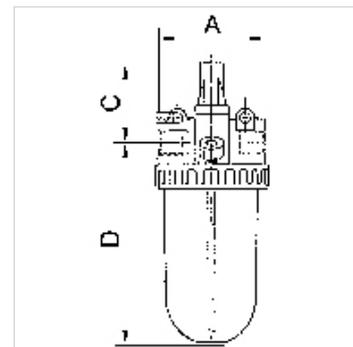

## Popis

Proportional lubricators, oil can be filled under pressure.

## Výrobok

| Označenie      | Závit   | Prietok (L/min) | A: (mm) | C (mm) | D: (mm) | DN |
|----------------|---------|-----------------|---------|--------|---------|----|
| K- 07 25 08 88 | G 1/4   | 1200            | 50,0    | 51,0   | 119,5   | 6  |
| K- 07 25 08 91 | G 3/8   | 1200            | 50,0    | 51,0   | 119,5   | 6  |
| K- 07 25 08 94 | G 3/8   | 2400            | 70,0    | 51,0   | 145,0   | 10 |
| K- 07 25 08 97 | G 1/2   | 4000            | 79,0    | 55,0   | 157,0   | 15 |
| K- 07 25 09 00 | G 3/4   | 9000            | 102,0   | 58,0   | 160,0   | 20 |
| K- 07 25 09 03 | G 1     | 9000            | 90,0    | 58,0   | 160,0   | 25 |
| K- 07 25 09 06 | G 1 1/4 | 9000            | 137,0   | 70,0   | 232,0   | 40 |
| K- 07 25 09 09 | G 1 1/2 | 9000            | 125,0   | 70,0   | 232,0   | 45 |

## Náhradné diely

|                            |   |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD   | Holder  |
| K-SCHUTZKORB G             | Protective cage   |
| K-TROPFAUFSATZ POLYCARBO   | Drip attachment polycarbonate                             |
| K-XV AGM MS NI             | Double nipples, parallel male thread, nickel-plated brass |
| K-RD NIPPEL MS NI          | Reducing nipples - nickel-plated brass                    |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples  |
| K-TROPFAUFSATZ METALL      | Drip attachment metal                                     |