



K-ANFAV VARIOBLOC

Manifolds

HANSA FLEX

Vlastnosti

| | |
|-------------------------------|--|
| Prevádzkový tlak | 2 - 25 bar |
| Meranie prietochného množstva | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

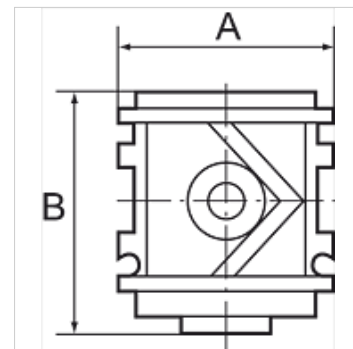

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

For slow pressure build-up in pneumatic systems, e.g. after an emergency stop. The valve opens to full flow at approximately 60% of the set operating pressure. The filling time can be set by turning the adjusting screw. Used in combination with multi-piece service units.

Výrobok

| Označenie | Závit | Prietok (L/min) | A: (mm) | B | Prevádzkový tlak |
|----------------|-------|-----------------|---------|---------|------------------|
| K- 07 25 11 84 | G 1/4 | 1200 | 48,0 | 54,0 mm | 2 - 25 bar |
| K- 07 25 11 85 | G 3/8 | 1400 | 48,0 | 54,0 mm | 2 - 25 bar |
| K- 07 25 11 86 | G 1/2 | 3800 | 70,0 | 72,0 mm | 2 - 25 bar |
| K- 07 25 11 87 | G 3/4 | 4200 | 70,0 | 72,0 mm | 2 - 25 bar |
| K- 07 25 11 88 | G 1 | 4200 | 124,0 | 72,0 mm | 2 - 25 bar |