

K-ANFAV VARIOBLOC
Manifolds

Vlastnosti

Prevádzkový tlak	2 - 25 bar
Meranie prietočného množstva	At P1 = 6 bar and pressure drop Δp = 1 bar

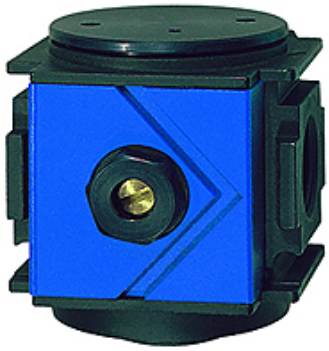

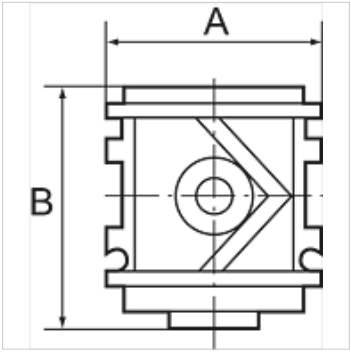

Poznámka
Ďalšie údaje na vyžiadanie.

Popis
For slow pressure build-up in pneumatic systems, e.g. after an emergency stop. The valve opens to full flow at approximately 60% of the set operating pressure.
The filling time can be set by turning the adjusting screw. Used in combination with multi-piece service units.

Výrobok

Označenie	Závit	Prietok (L/min)	A: (mm)	B	Prevádzkový tlak
K- 07 25 11 84	G 1/4	1200	48,0	54,0 mm	2 - 25 bar
K- 07 25 11 85	G 3/8	1400	48,0	54,0 mm	2 - 25 bar
K- 07 25 11 86	G 1/2	3800	70,0	72,0 mm	2 - 25 bar
K- 07 25 11 87	G 3/4	4200	70,0	72,0 mm	2 - 25 bar
K- 07 25 11 88	G 1	4200	124,0	72,0 mm	2 - 25 bar

Napriek čo najstarostlivejšej kontrole nemôžeme vylúčiť chyby a nepreberáme žiadnu záruku za zahrnuté údaje.