


K-DRG DRVS VARIOBLOC

Pressure regulators with pressure supply at both ends

HANSA FLEX

Vlastnosti

| | |
|------------------------------|---|
| Vstupný tlak | Max. 25 bar |
| Teplota média | max. 50 °C |
| Teplota okolia | Max. 50 °C |
| Tesniaci materiál | NBR |
| kryt pružiny | POM-brass |
| Kryt | Die-cast zinc |
| Meranie prietočného množstva | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

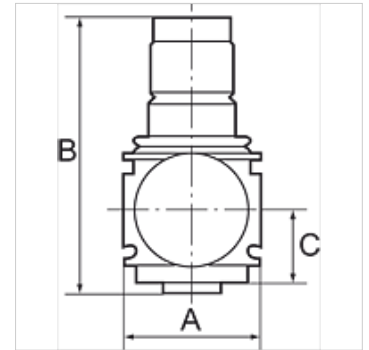

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down.
By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

Pokyny pre objednanie

Pressure regulators are also available in lockable version. Please ask for more information.

Výrobok

| Označenie | Závit | Rozsah regulácie | Prietok (L/min) | A: (mm) | B | C (mm) |
|----------------|-------|------------------|-----------------|---------|---------|--------|
| K- 07 25 04 33 | G 1/4 | 0.5 - 6 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 34 | G 1/4 | 0.5 - 10 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 35 | G 1/4 | 0.5 - 16 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 36 | G 3/8 | 0.5 - 6 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 37 | G 3/8 | 0.5 - 10 bar | 1800 | 48,0 | 98,0 mm | 26,0 |
| K- 07 25 04 38 | G 3/8 | 0.5 - 16 bar | 1800 | 48,0 | 98,0 mm | 26,0 |

Náhradné diely

K-VERSCHLEI-SATZ VARIOBLOC Set of wearing parts