


K-WTEH 3-TLG MET SICH TROPF VARIOBL

Service units, 3-piece with metal bowl, incl. sight glass and metal sight dome

HANSA FLEX

Vlastnosti

| | |
|------------------------------------|---|
| Vstupný tlak | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Teplota média | max. 50 °C |
| Teplota okolia | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Veľkosť pórov vo filtračnej vložke | 40 µm |
| Tesniaci materiál | NBR |
| kryt pružiny | POM |
| Kryt | Die-cast zinc |
| Membrána | NBR |
| Vložka kvapkadla | PA |
| Drain valve | Manual |
| Meranie prietochového množstva | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

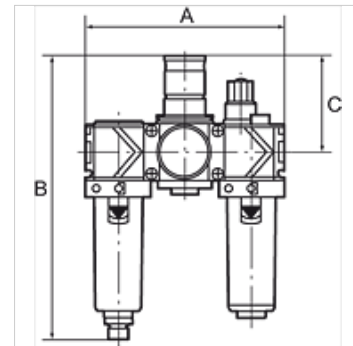

Poznámka

Ďalšie údaje na vyžiadanie.

Popis

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Pokyny pre objednanie

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Dodatočné informácie

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

Výrobok

| Označenie | Závit | Rozsah regulácie | Prietok (L/min) | A: (mm) | B | C (mm) |
|----------------|-------|------------------|-----------------|---------|----------|--------|
| K- 07 25 14 12 | G 1/4 | 0.5 - 10 bar | 1500 | 144,0 | 201,0 mm | 68,0 |
| K- 07 25 14 14 | G 3/8 | 0.5 - 10 bar | 1800 | 144,0 | 201,0 mm | 68,0 |
| K- 07 25 14 16 | G 1/2 | 0.5 - 10 bar | 3400 | 210,0 | 274,0 mm | 98,0 |
| K- 07 25 14 18 | G 3/4 | 0.5 - 10 bar | 5000 | 210,0 | 274,0 mm | 98,0 |
| K- 07 25 14 20 | G 1 | 0.5 - 10 bar | 5000 | 264,0 | 274,0 mm | 98,0 |

Náhradné diely

| | |
|----------------------------------|--|
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |
| K-FILTERELEMENT VARIOBLOC | Filter element |
| K-ERSATZBEHAELTER VARIOBLOC POLY | Spare tank Polycarbonat |
| K-TROPFAUFSATZ VARIOBLOC | Drip attachment |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |